

LD-5R Digital Dust Indicator

LD-5R PM2.5 Digital Dust Indicator



LD-5R Digital Dust Indicator



LD-5R PM2.5 Digital Dust Indicator

with PM2.5 Cyclone

◆ LD-5R Digital Dust Indicator

Compact handheld dust indicator

Performs real time measurement of suspended particle matter (SPM) in indoor spaces, public spaces and for industrial health purposes

◆ LD-5R PM2.5 Digital Dust Indicator



LD-5R digital dust indicator equipped with a PM2.5 cyclone particle size selector

Portable and performs simplified measurement of PM2.5 concentrations on a real time basis

Principle

The LD-5R digital dust indicator is a relative concentration meter based on the light scattering method. It measures the dust level in less time than the filtrated collection method. Due to its characteristics, the relative concentration may be converted into mass concentration with the use of the coefficient of conversion into mass concentration (K factor) calculated on the basis of the filtrated collection method.

The LD-5R PM2.5 digital dust indicator is a combination of the LD-5R with a PM2.5 cyclone particle size selector to perform the simplified measurement of PM2.5 concentrations.

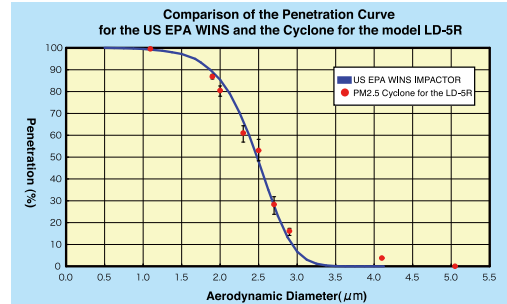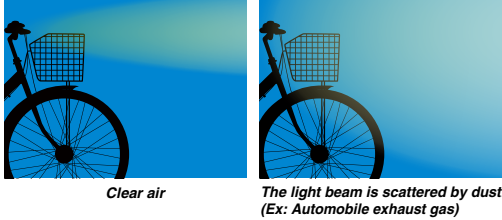

LD-5R digital dust indicator



LD-5R PM2.5 digital dust indicator



Examples of application

- 1** Measurement of dust concentration in office buildings and indoor public places




Indoor air quality (Building)

- 3** Measurement of dust concentration at construction sites



Construction site

- 2** Measurement of dust concentration in factories for occupational health purposes

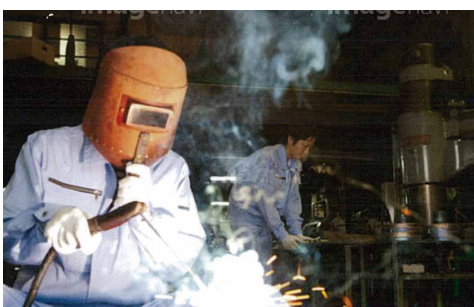

Industrial Hygiene (Factory)

- 4** Simplified monitoring for PM2.5

* For the LD-5R PM2.5 digital dust indicator only




PM2.5 monitoring

Features

1 Display

The products are equipped with color LCD displays that facilitate character recognition and the viewing of measurement results at dark measurement sites. In addition, they incorporate a LED indicator that indicate the operation status to allow operators to view the operation status from a location that is remote from the position where the indicator is placed.



Color LED display



LED indicator

2 Real time monitoring


They adopt the light scattering method to perform real time dust monitoring.



Real time monitoring

3 High level of measurement precision

They adopt the purge air system to prevent dust in the sucked-in air from adhering to the optical system. After the end of measurement, it replaces the air inside the detector to maintain cleanliness and ensure outstanding durability.



Purge air system

4 Ease of maintenance

For maintenance, it is sufficient to replace the cylindrical filter and the circular filter.

The sucked-in air passes through the cylindrical filter paper at the bottom of the main unit. This protects the pump from the dust that is sucked in. A circular filter paper is mounted on the outlet of the suction pump. The air that passes through this filter paper is supplied to the detector as purged air.



Easy filter replacement


5 Compact size for measurement

The size is 31% smaller and the weight is 0.6 kg lower than the old model(LD-5).



6 Pump suction system


The suction system employs a pump that is more powerful than a fan. That has paved the way for the stability of measurement and the attachment of a particle size selector.

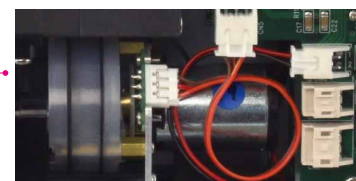

Suction pump

7 Particle size selector

The right diagram portrays the correlations between the dust indicator with the PM2.5 particle size selector and the official method. The PM2.5 particle size selector employs the cyclone method to ensure very easy maintenance. As an option, a PM10 cyclone particle size selector is also available.



Correlations with mass concentration method



Measurement site

Specifications

LD-5R Digital Dust Indicator

Code No.	080000-72	
Model	LD-5R	
Measuring Principle	Light scattering method	
Light Source	Laser diode	
Measurement Sensitivity	1 CPM = 0.001 mg/m ³ (for standard particles)	
Measurement Range	0.001 to 10.000 mg/m ³ (for standard particles)	
Measurement Accuracy	±10% (for standard particles)	
Suction Flow Rate	1.7 L/min.	
Suction Equipment	Suction pump	
Display	Color graphic LCD	
Data on Display	<ul style="list-style-type: none"> Cumulative count Measurement time Bar chart Instantaneous value (CPM) Trend chart Current time Mass-concentration conversion value K factor Remaining battery power Error message 	
Function	Timer	Time set at 1, 2, 10, 60 or 240 minute(s), discretionary setting, manual
	Logging Measurement	Number of logging points: 60,000 Minimum logging cycle: 1 second Maximum measurement time: 9,999 hours and 59 minutes Log data: CPM value, measurement start time, data counts, logging cycle and etc.
	Span Check	Automatic sensitivity correction
	BG Reset	BG measurement, recording and reduction
Output	Analog	0-1 VDC, Output impedance 100Ω, Three range selection (1) 0 to 1,000 CPM: 0-1 V, 1,000 to 10,000 CPM: 0.1-1 V (2) 0 to 1,000 CPM: 0-1 V (3) 0 to 10,000 CPM: 0-1 V
	Pulse	Open collector Withstand voltage: 12 V maximum
	USB	Output of data recorded on the main unit
Communication: USB		Reading of data and main unit setting with the use of dedicated USB communication software
Power Source	Batteries	AA alkaline batteries: 6 pieces Operating time: Approx. 10 hours
	AC Adapter	100 to 240 V AC
Operating Environment		Temperature: 0 to 40 deg. C, Humidity: 5 to 90%
Dimensions		184 mm W × 68 mm D × 109.5 mm H
Weight		Approx. 1.1 kg (incl. batteries)
Standard Accessories		AC adapter, six AA batteries, shoulder belt and set of filters
Options		Soft case, communication cable with software, air suction adaptor, and analog pulse cable

LD-5R PM2.5 Digital Dust Indicator

Code No.	080000-725	
Model	LD-5R PM2.5	
Standard Accessories	PM2.5 cyclone particle size selector, standard inlet, AC adapter, six AA batteries, shoulder belt and set of filters	

Options and spare parts

 <p>Carry Bag for LD-5R</p> <p>item code 080000-726</p>	 <p>Data communication cable with software for LD-5R</p> <p>item code 080000-7203</p>	 <p>High Efficiency Backup Filter for LD-5R</p> <p>item code 080000-7202</p>	 <p>T60A20 Teflon-Coated Glass Fiber Filters, 20mm dia. 50pcs/set</p> <p>item code 080130-60220</p>	 <p>Suction adaptor for LD-5R</p> <p>item code 080000-087</p>
 <p>Analog Pulse cable for LD-5R</p> <p>item code 080000-7204</p>	 <p>AC Adapter Model PA-1210</p> <p>item code 080000-1210</p>	 <p>PM10 Cyclone for LD-5R</p> <p>item code 090000-101</p>	 <p>PM2.5 Cyclone for LD-5R</p> <p>item code 080000-251</p>	

Specifications, and appearance described in this document are based on information as of 25 October, 2015. They are subject to change without notice for improvement of the product.

SIBATA SCIENTIFIC TECHNOLOGY LTD.

 1-1-62, Nakane Soka-City, Saitama, Japan
 TEL:+81-48-933-1582 FAX:+81-48-933-1591
 E-mail:overseas@sibata.co.jp
<http://www.sibata.co.jp/english/>